


300 NANOSECOND AT 200 °C HIGH TEMPERATURE- FAST RECOVERY HIGH VOLTAGE RECTIFIER DIODES

- Exceptional high temperature Stability up to 200 °C
- Exceptionally low leakage
- Small size
- 3KV PRV

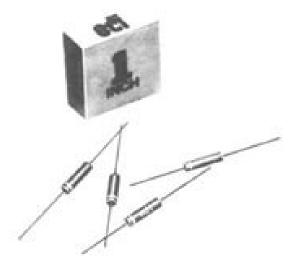

Our proprietary diffusion and passivation process provides this unusual stability and no leakage drift at these elevated temperatures. All diodes are subjected to 10 temperature cycles from -55 °C to + 200 °C.

EDI TYPE NO.	PEAK REVERSE VOL TAGE	DIMENSIONS
HTDR-3	3,000	See Fig.2

ELECTRICAL CHARACTERISTICS (at T_A =25 $^{\circ}C$ Unless Otherwise Specified)

Average Rectified Forward Current @ 50 °C, I _O Average Rectified Forward Current @ 200 °C, I _O	50 mA 1 mA
Max DC Reverse Current @ PRV @ 25 °C, I _R	0.1 μA Max
Max DC Reverse Current @ PRV @ 200 °C,I _R (See Note:1)	30μΑ max 18 μΑ typical
Max Reverse Recovery, T _{rr} (See Fig.1 and 3)	50ns.max at 25 °C 300ns.max at 200 °C
Max. Fwd. Voltage Drop at 25°C and 10ma ,VF	25 Max V
Forward Stability Tj 200 °C	(See Note 2)
Ambient Operating and Storage Temperature Range	-55 °C to+200 °C

Note 1: IR at 200 $^{\circ}$ C readings are taken in oil after voltage has been applied to device for 5 minutes.

Note 2: All diodes are hot forward swept for forward stability to maximum temperature of 200 °C on dynamic display on curve trace oscilloscope.

EDI reserves the right to change these specifications at any time without notice.

Figure 1
REVERSE RECOVERY vs TEMPERATURE


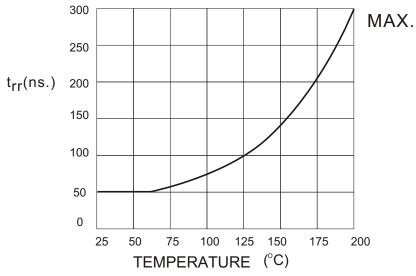


Figure 2
DIMENSIONS

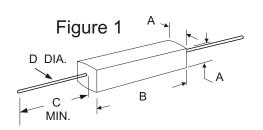


	DIMENSIONS					
	INCHES		MILLM	ETERS		
	Min.	Max.	Min.	Max.		
Α	.095	.125	2.41	3.17		
В	.380	.420	9.65	10.66		
С	.500	-	10.27			
D	.016	.020	0.40	0.51		


Longer leads available. Consult factory.

Maximum lead and terminal temperature for soldering, 3/8 inch from case,5 seconds at 250 °C.

Figure 3
TYPICAL REVERSE RECOVERY WAVE FORM

TYPICAL REVERSE RECOVERY WAVEFORM

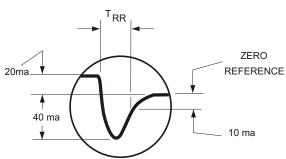

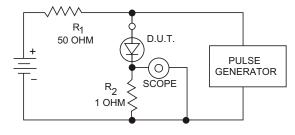

 $^{\rm R1},^{\rm R2}$ non-inductive resistors pulse generator - Hewlett Packard 214a or equiv IKC rep.rate, 10 μ sec. pulse width adjust pulse amplitude for Peak $\rm I_R$

ELECTRONIC DEVICES, INC. DESIGNERS AND MANUFACTURERS OF SOLID STATE DEVICES SINCE 1951. 21 GRAY OAKS AVENUE * YONKERS. NEW YORK 10710 914-965-4400 * FAX 914-965-5531 * 1-800-678-0828 e-mail:sales@edidiodes.com * website: http://www.edidiodes.com